## 14000

## NISSAN NV 1500, 2500, & 3500 (ALL MODELS)

## 5/05/2011

GROSS LOAD CAPACITY WHEN USED AS A WEIGHT CARRYING HITCH: 10.000 LBS. TRAILER WEIGHT & 1.000 LBS. TONGUE WEIGHT. GROSS LOAD CAPACITY WHEN USED AS A WEIGHT DISTRIBUTION HITCH: 12,000 LBS, TRAILER WEIGHT & 1,200 LBS, TONGUE WEIGHT

\*\*\*DO NOT EXCEED VEHICLE MANUFACTURER'S RECOMMENDED TOWING CAPACITY.\*\*\* HAVING INSTALLATION QUESTIONS? CALL TECHNICAL SUPPORT AT 1-800-798-0813

	Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION	
1	8	M12 - 1.25 x 40 HEX	HEX BOLT	
2	8	1/2"	CONICAL TOOTHED WASHER	
3	2	1/2-13 x 1	CARRIAGE BOLT	
4	2	HFN 1213	HEX FLANGE NUT	


TOOLS REQUIRED	
TORQUE WRENCH	
RATCHET	
3/4" SOCKET	
19mm SOCKET	

PASSENGER SIDE FRAME RAIL





small wire brush. (Be careful not to damage threads)

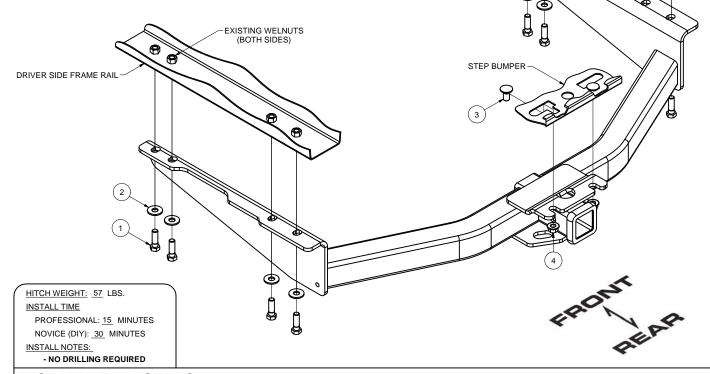

## **INSTALLATION STEPS**

- 1. Insert 1/2-13 x 1" carriage bolts into the rear step bumper slots, as shown.
- 2. Raise hitch into position aligning holes in hitch with weldnuts in the frame rails and the carriage bolts installed in Step 1.
- 3. Secure hitch to weldnuts using M12-1.25 x 40 hex bolts and 1/2" conical toothed washers. See Weldnut Cleaning Detail
- 4. Secure the hitch to the step bumper using 1/2-13 hex flange nuts.
- 5. Torque all M12 hardware to 72 ft-lbs. Torque all 1/2" hardware to 75 ft-lbs.

PERIODICALLY CHECK THIS RECEIVER HITCH TO ENSURE THAT ALL FASTENERS ARE TIGHT AND THAT ALL STRUCTURAL COMPONENTS ARE SOUND.

Curt Manufacturing LLC., warrants this product to be free of defects in material and/or workmanship at the time of retail purchase by the original purchaser. If the product is found to be defective, Curt Manufacturing LLC., may repair or replace the product, at their option, when the product is returned, prepaid, with proof of purchase. Alteration to, misuse of, or improper installation of this product voids the warranty. Curt Manufacturing LLC is liability is limited to repair or replacement of products found to be defective, and specifically excludes liability for incidental or consequential loss or damage.