

# REESE

## INSTALLATION INSTRUCTIONS

Product No.

### SUBURBAN

### 45004

You *can* take it with you.

ELKHART, IN., OAKVILLE, ONT.

SMALL PARTS  
PACKAGE 45119

**WARNING:** DO NOT LUBRICATE THREADS, BOLT FAILURE MAY OCCUR DUE TO OVER TIGHTENING.


**WARNING:** DO NOT DRILL OR WELD TO THIS HITCH.

#### IMPORTANT NOTES

USE ONLY REESE SUPPLIED OR APPROVED BOLTS, LOCKNUTS, AND WASHERS TO INSTALL THIS HITCH

#### TOOLS REQUIRED

3/4" SOCKET  
3/4" WRENCH  
1/2" DRILL  
TORQUE WRENCH

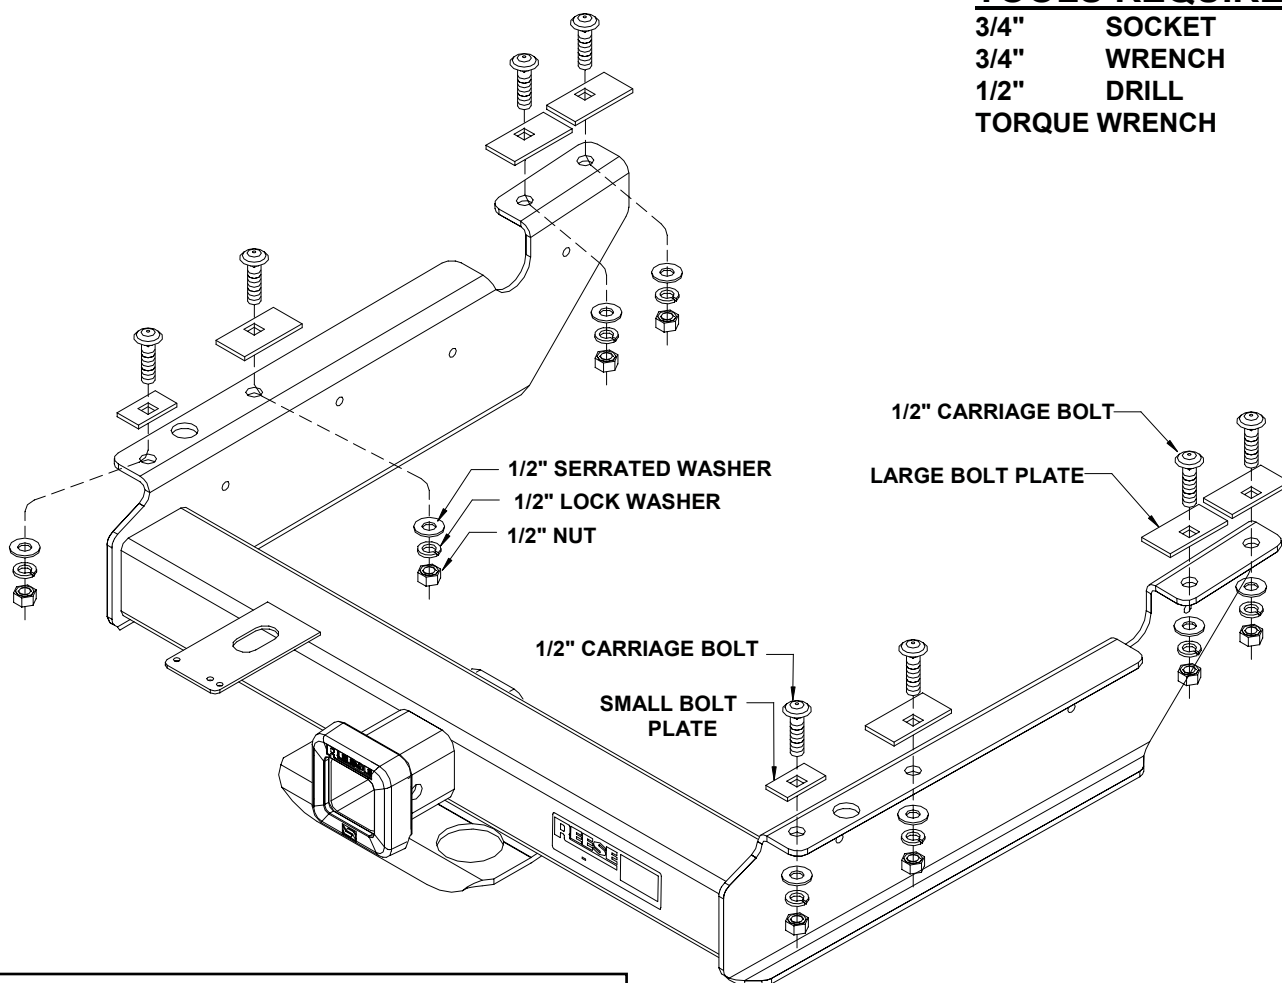

**NOTE:** THIS PRODUCT IS NOT RECOMMENDED FOR USE ON A 1/2 TON VEHICLE.

1. Hold the hitch up to the frame. Position it so that the rear holes in the hitch align with the rear hole in the vehicle's frame.
2. Insert a 1/2" carriage bolt with the small bolt plate into the rear hole. Install a 1/2" serrated washer, lock washer, and nut on the bolt. Repeat for the other side. See the diagram above.

(OVER)

For Installation Assistance or Technical Help, Call 1-800-758-0869



3. Screw a carriage bolt onto the pull wire and place a large bolt plate over the bolt. Thread the wire in through the end of the frame and through the second hole. Pull the bolt down through the hole. Install a 1/2" serrated washer, lock washer, and nut on the bolt. Repeat for the other side.
4. Using the holes in the bracket as a guide, drill four 1/2" holes into the frame. Repeat for the other side.
5. Using the pull wire, pull a carriage bolt and large bolt plate down into all four holes. Install 1/2" serrated washers, lock washers, and nuts on all of the bolts. See the diagram on the other side.
6. Torque all 1/2" nuts to 75 ft.\*lb.

**NOTE:** To use the adapter bushing with some 2" weight distributing bars, it will be necessary to sand the corners of the bar to get it into the bushing.

For Installation Assistance or Technical Help, Call 1-800-758-0869

THIS PRODUCT COMPLIES WITH SAFETY SPECIFICATION AND REQUIREMENTS FOR THE STATE OF NEW YORK AND VESC REGULATION V-5 FOR CONNECTING DEVICES AND TOWING SYSTEMS. WEIGHT DISTRIBUTING HITCH RATING IS 14000 LB. MAX. GROSS TRAILER WEIGHT AND 1700 LB. MAX. TONGUE WEIGHT. WEIGHT CARRYING HITCH RATING IS 12000 LB MAX GROSS TRAILER WEIGHT AND 1200 LB MAX TONGUE WEIGHT. CONSULT VEHICLE OWNERS MANUAL FOR TOWING RECOMMENDATIONS AND LIMITATIONS.

## LIMITED WARRANTY

Reese warrants its Hitches, custom Hitch Receivers, and Sway Controls from date of purchase against defects in material and workmanship under normal use and service, ordinary wear and excepted, for the ownership life of the original consumer purchaser. Reese will replace FREE OF CHARGE any part which proves defective in material or workmanship when presented to any Reese dealer, Reese Warehouse or return to factory. TRANSPORTATION CHARGES PREPAID, at the address below. THIS WARRANTY IS LIMITED TO DEFECTIVE PARTS REPLACEMENT ONLY. LABOR CHARGES AND/OR DAMAGE INCURRED IN INSTALLATION OR REPLACEMENT AS WELL AS INCIDENTAL AND CONSEQUENTIAL DAMAGES CONNECTED THEREWITH ARE EXCLUDED. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. Any damage to the Hitch, Custom Hitch receiver or Sway Control as a result of misuse, abuse, neglect, accident, improper installation, or any use violative of instructions furnished by us, WILL VOID THE WARRANTY. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state. In the event of a problem Reese warrants its Hitches, Custom Hitch Receivers and Sway Controls from date of purchase against defects in material and workmanship under normal use and service, ordinary wear and tear excepted, for the ownership life of the original consumer purchaser. with warranty service or performance, you may be able to go to a small claims court, a state court, or a federal district court.

Reese Products, Inc.  
51671 State Road 19-N  
Elkhart, IN 46514

Reese Products of Canada, Ltd.  
475 Wycroft Road  
Oakville, Ontario  
Canada L6K2H2