

HP10028 - DOUBLE AIR HORN



Product Description

Operation medium
Decibel rating at 6 m [20 ft]
Fundamental Frequency
Operating Temperature Range

Weight

Operating air Pressure

Materials
Finish
Actuation Type
Air Inlet Port

Air

125 db @ 6.89 bar (gauge) [100 psig]

1800-3550 Hz

-40°C to 120°C [-40°F to 248°F]


0.6 kg [1.4 lbs]

3.45-10.34 bar (gauge) [50-150 psig] Cast Aluminum and Thermoplastic

Chrome

Manual, or Solenoid

1/4 (-4) NPT

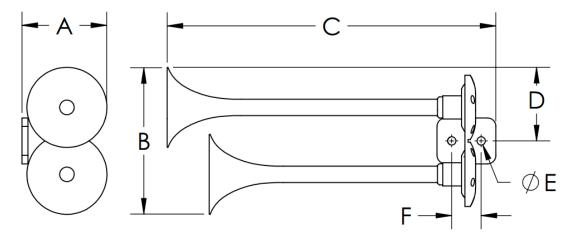

A - Width	B - Height	C – Length	D - Height	E – Mounting Holes	F – Bolt Spacing
95 mm	175 mm	360 mm	87.20	9.5 mm	35 mm
[3.74 in]	[6.89 in]	[14.57 in]	[3.43 in]	[0.38 in]	[1.38 mm]