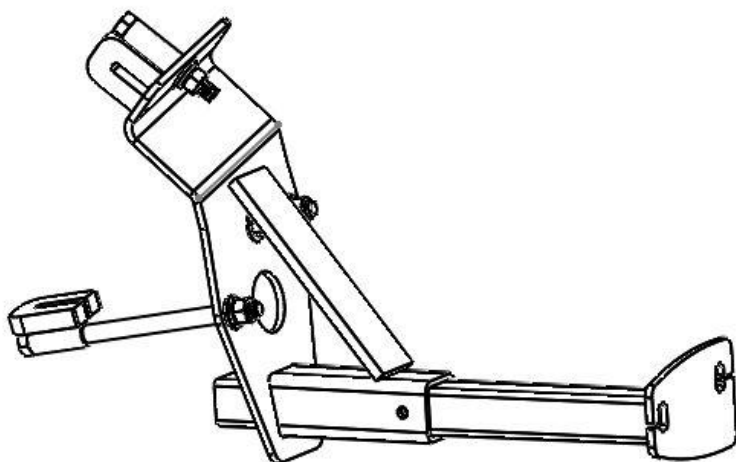




OVER 35 YEARS OF INNOVATION, QUALITY, SAFETY.
IMPORTANT OWNER-OPERATOR INSTALLATION INSTRUCTIONS

D2130, D2131



Version Number: 1, Date: 1/22/2016 By: RS

TECH SUPPORT (800) 246-8132

**AFTER INSTALL, PLEASE GIVE
THIS BOOKLET TO YOUR CUSTOMER**

Warnings

Truck Bed and Camper Protection

Torklift **does not** recommend installing your camper on top of a plastic bed liner (or other compressible material such as foam). These materials can act as a spring, causing increased vertical truck camper movement independent of the vehicle. Plastic bed liners can slide on the truck bed surface, and the truck camper can slide on top of the bed liner. Using a plastic bed liner or similar compressible material will void your warranty and may additionally cause truck bed and/or camper damage.





Minor movement or settling can occur in some incidental harsh driving conditions (on or off-road). A rubber bed mat is recommended to protect the truck bed and camper, but is not a requirement to maintain the Torklift legendary lifetime warranty.

Suspension



To significantly reduce body roll, sag and sway Torklift strongly recommends the StableLoad. Torklift International StableLoads improve safety, handling, and to help level your truck. More information can be found at (www.Torklift.com/stableload).

If your truck is additionally equipped with suspension air bags Torklift cautions against over pressurization as this may lead to unsafe vehicle handling characteristics. We have found that airbags used in conjunction with StableLoads have allowed operators to lower air bag pressure by 50% or more. Only pressurize suspension air bags enough to level the truck.

Parts Inventory

Item Image	Item Description	Quantity
	Tie Down Receiver	2
	Straight Tie Down Insert (D2130 Only)	2
	Bent Tie Down Insert (D2131 Only)	2
	Clamp Plate	2
	Top Mount Hook Bracket	2
	Side Mount Hook Bracket	2
	1/2"-13 x 8-1/2" GR8 Hex Bolt	2
	1/2"-13 x 2" GR8 Hex Bolt	2
	1/2"-13 GR8 Hex Nut	6
	1/2" SAE Flat Washer	8
	1/2"-13 x 3-1/2" GR8 Bolt	2
	1/2" Lock Washer	6

Parts Inventory

Item Image	Item Description	Quantity
	3/8"-16 x 1-1/2" SS Bolt	2
	3/8" Flat Washer	6
	3/8"-16 Thin Nylock Nut GR8	2
	Snapper Pin	2

Installation Notes:

Step 1

Starting with the driver side of the vehicle, locate the front leaf spring perch on the side of the frame, just behind the rear most cab mount. This will be the mounting location for the **Tie Down Receiver**. See Figure 1.1



Figure 1.1

Step 2

Insert a **1/2"-13 x 3-1/2" Hex Bolt GR8** into a **Top Mount Hook Bracket**. Hook the top of **Top Mount Hook Bracket** over the top of the spring hanger bracket. (See figure 2.1) Place the **Tie Down Receiver** over the top of the spring perch mount, with the large hole sitting over the head of the main spring bolt. Secure the **1/2"-13 x 3-1/2" Hex Bolt GR8** with one **1/2" SAE Washer GR8**, one **1/2" Lock Washer** and one **1/2"-13 Hex Nut GR8** shown in Figure 2.2 below. Hand Tighten.



Figure 2.1

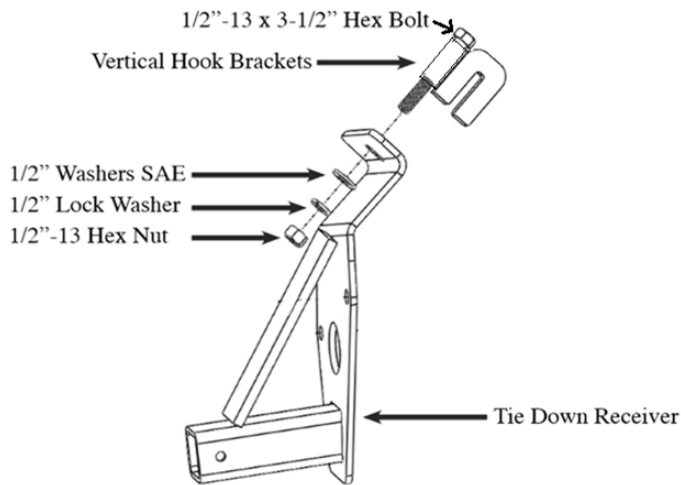


Figure 2.2

Step 3

From inside the spring perch, Insert the **3/8"-16 x 1-1/2" SS Bolt** and **3/8" Flat Washer** through the small hole in the **Clamp Strap** and out through the small hole just above the leaf spring bolt as shown in Figure 3.1. Use one **3/8" Flat Washer** and one **3/8"-16 Thin Nylock Nut GR8** on the outside of the **Tie Down Receiver** to secure the **Clamp Plate**. The end of the bolt threads must not contact the reinforcement flat bar of the **Tie Down Receiver**. If necessary, use an extra **3/8" Flat Washer** under the bolt head to create clearance.

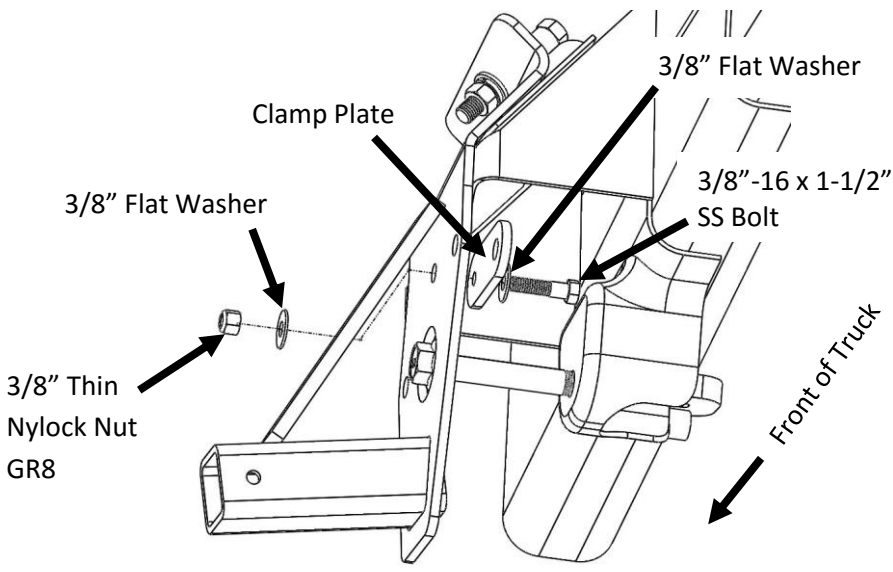


Figure 3.1 (Leaf spring not shown for clarity. Driver side shown)

Step 4

Insert the **1/2"-13 x 2" GR8 Hex Bolt** with one **1/2" SAE Flat Washer** through the **Clamp Plate** and tie down receiver hole as shown in Figure 4.1. Secure the bolt with one **1/2" SAE Flat Washer**, one **1/2" Lock Washer** and one **1/2"-13 GR8 Hex Nut**.

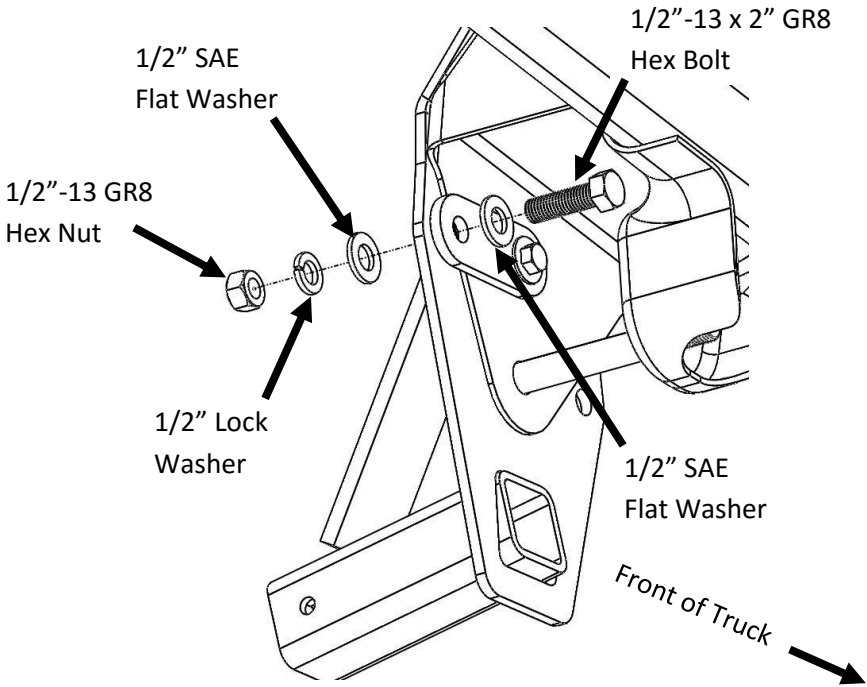


Figure 4.1 (Leaf spring not shown for clarity. Driver side shown)

Step 5

With all hardware loose, install one **1/2"-13 x 8-1/2" GR8 Hex Bolt** through a **Side Mount Hook Bracket**. Hook the bracket onto the front side of the spring perch as shown in Figure 5.1. Secure the **Tie Down Receiver** to the **1/2"-13 x 8-1/2" GR8 Hex Bolt** with one **1/2" SAE Washers GR8**, one **1/2" Lock Washer** and one **1/2"-13 Hex Nut GR8**. Make sure the **Side Mount Hook Bracket** is pushed up as far as possible on the leaf spring hanger.

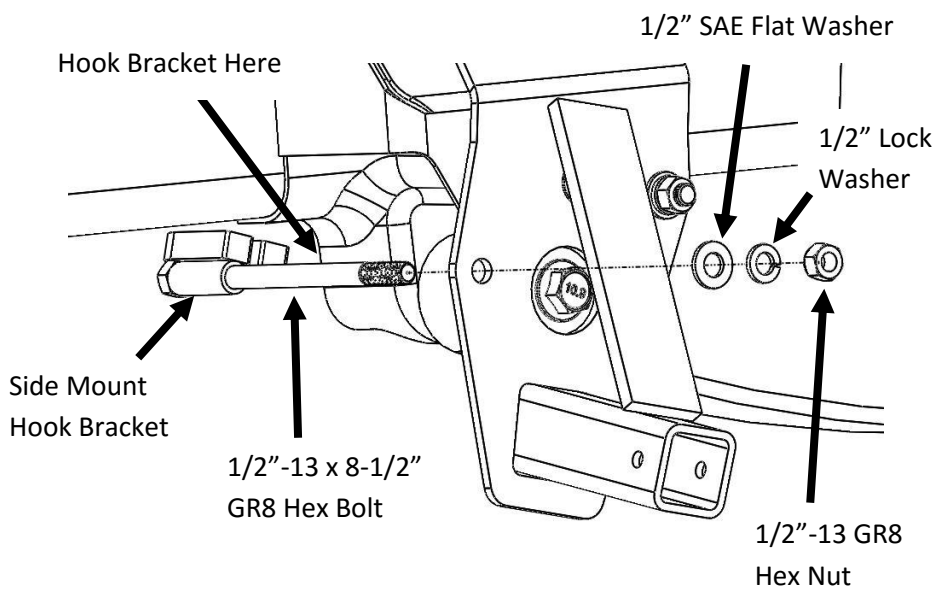


Figure 5.1 (Driver side shown)

Repeat steps 1 through 5 on the passenger side of the truck.

Step 6

Tighten all hardware evenly, beginning with the **Top Mount Hook Bracket**. The 3/8" hardware should be torqued to 30 lb-ft, and the 1/2" hardware should be torqued to 55 lb-ft.

TIEDOWN INSERT INSTALLATION INSTRUCTIONS

On one end of each of your tie down inserts is a triangular plate referred to by Torklift as a bullet plate. In most cases, the tie down inserts should be installed with the shorter side of the bullet plate facing away from each other (The shorter side of the front insert should point to the front of the truck and the shorter side of the rear insert should point towards the rear of the truck).



DRIVERS SIDE FRONT



DRIVERS SIDE REAR

Once installed, attach the TorkLift directional stickers to the face of the bullet plate on the insert as a reminder.

IMPORTANT NOTE: *Your tie down inserts are designed to have clearance inside of the receiver. This is to account for road debris, as well as aid in installation and removal. Some rattle may be expected if the inserts are left installed while not under load from the camper.*

Torklift International Limited Lifetime Warranty Information

322 Railroad Ave North, Kent, WA 98032

Torklift will require proof of purchase to register, with pictures of any defective product before issuing a replacement. Torklift will not register any product without proof of purchase, which can be faxed, scanned, emailed, or mailed to the information provided below. Torklift warrants its hitches, custom hitch receivers, frame mounted tie downs, turnbuckles, and accessories (excluding wire harnesses which carry a 90 day warranty) from date of purchase against defects in material and workmanship under normal use and service for the ownership life of the original consumer purchaser. All plastic, rubber, and/ or electrical components maintain a warranty of up to one year from the date of the purchase. **ALL COMMERCIAL APPLICATIONS ARE WARRANTED FOR A PERIOD OF 90 DAYS FROM THE DATE OF INSTALLATION/SERVICE.** Torklift will replace **FREE OF CHARGE** any part which proves defective in material or workmanship when presented to Torklift, **TRANSPORTATION CHARGES PREPAID** by purchaser, at the address above. **THIS WARRANTY IS LIMITED TO DEFECTIVE PARTS REPLACEMENT ONLY. LABOR CHARGES AND/OR DAMAGE INCURRED IN INSTALLATION OR REPLACEMENT, AS WELL AS INCIDENTAL AND CONSEQUENTIAL DAMAGES CONNECTED THEREWITH ARE EXCLUDED.** This warranty does not include the finish or paint on our products. Rusting, cracking or peeling of the finish is also excluded. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. Any damage to Torklift products as a result of misuse, abuse, neglect, accident, improper installation or any use violation of instructions furnished by Torklift or **WHEN USED IN ANY COMMERCIAL APPLICATION WILL VOID THE WARRANTY.** This warranty gives you specific legal rights, and you may also have rights which vary from state to state. With warranty service, you may be able to go to a small claims court, a state court or a federal district court.



322 Railroad Ave North, Kent, WA 98032

Phone (800) 246-8132 Fax (253) 854-8003

Or visit our website: www.TorkLift.com

Dear Valued Customer,

Thank you for making TorkLift your choice for truck, camper packages and accessories for your vehicle. By choosing TorkLift products, you have chosen a company that has been serving the RV industry for nearly 40 years and whose name has become synonymous with strength, quality and advanced design and installation.

Please take a few moments of your time to complete the Product Registration Warranty Card on the next page. When registering your newly purchased TorkLift products, you can be assured that your contact information is secure and that you and your product are getting the attention and respect that you deserve.

Thank you again for choosing TorkLift quality products.

Register for your lifetime warranty and receive a free Torklift International gift.

To Fax: Send copies of the questionnaire, warranty card and receipt to
253-854-8003

To E-mail: Send copies of the questionnaire, warranty card and receipt to
warranty@torklift.com

To Mail: Send to Torklift International 322 Railroad Ave North, Kent, WA 98032



OFFICIAL WARRANTY REGISTRATION CARD

322 Railroad Ave North, Kent, Wa 98032

Please fill out this form completely and return to Torklift within 30 days of purchase accompanied by a copy of your original receipt

1. PART(S) PURCHASED

TODAY'S DATE: _____

PART #: _____ PART #: _____

PART #: _____ PART #: _____

PART #: _____ PART #: _____

2. PURCHASER INFORMATION

NAME: _____

ADDRESS: _____

CITY: _____ STATE: _____ ZIP / POSTAL CODE: _____

PHONE: (____) _____ - _____ EMAIL: _____

3. TRUCK INFORMATION

YEAR: _____ MAKE: _____

MODEL: _____ BED LENGTH: _____

4. CAMPER INFORMATION

YEAR: _____ MAKE: _____ MODEL: _____

5. DEALER INFORMATION

PURCHASED FROM: _____

ADDRESS: _____

CITY: _____ STATE: _____ ZIP / POSTAL: _____

INSTALLED BY: _____ OWNER _____ ABOVE DEALER _____ ANOTHER DEALER _____

IF ANOTHER DEALER, WHO: _____